

→ Countertop Osmosis Dispenser

RO ZIP

(Ref. 349202)

SPECIFICATIONS

INLET TEMPERATURE (MAX.-MIN.)	40 °C - 2 °C
INLET TDS	800 ppm
INLET HARDNESS	25°HF
MEMBRANE	1812 75 GPD
MEMBRANE OUTPUT	200 LPD*
MEMBRANE PRESSURE	34 bar
PUMP	Booster pump
POWER SUPPLY	24 Vdc 24W
EXTERNAL POWER ADAPTER	100-240V. 50/60Hz: 24Vdc.
TREATED WATER TANK CAPACITY	2 liters
UNTREATED WATER TANK CAPACITY	4 liters
WEIGHT	15 Kg

ENCAPSULATED
MEMBRANE

FT FILTER



SAFETY LOCK



LED INDICATOR



ECO-FRIENDLY




ZERO INSTALLATION



PRESSURE PUMP



PLUG & PLAY

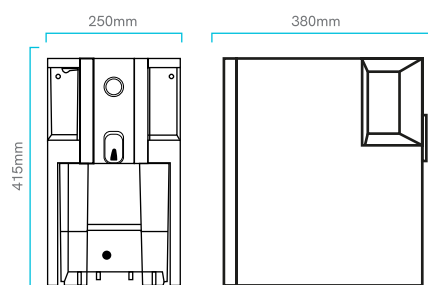

WLG (B-60326279), is member of the Water Quality Association.



ACCREDITED BY ENAC
Certif. nº 34/5200/14/0712

The trading of water treatment and household appliances as well as designing and teaching of non-official training courses related with its technology are certified and comply with the UNE-ISO-9001 far WLG (B-60326279).



WLG (B-60326279) is an Aqua España member, who belongs Aqua Europa (Federation of European nation associations).



WLG (B-60326279), has the rights granted for Authorized Economic Operator with number ESAEOF18000008U6 and 13/02/2018 as a date of entry of the authorization.